


Pamaz[®]

Soft Touch Pro

Our classic, supple faux leather with high performance

Upholstery
FR Contract Fabric



Fire Retardant



Waterproof



ShieldPlus
Antimicrobial



Acryltron[™]
Superior
Stain Resistance



Outdoor/Indoor




PFAS Free



REACH Compliant



Latex Free

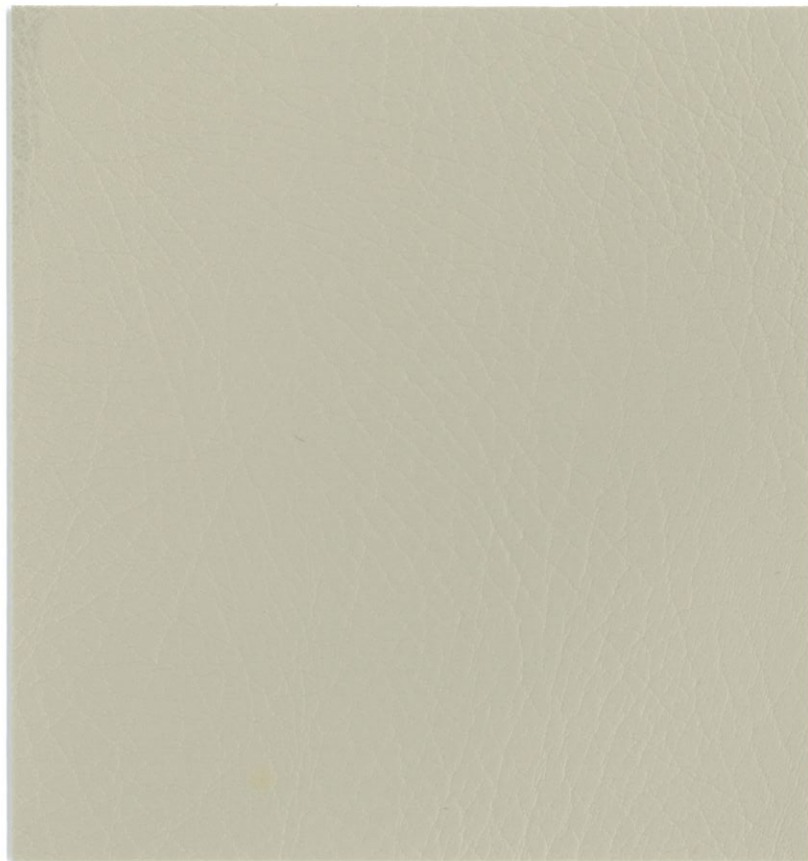


Soft Pro Touch
905 Dove

LRV 45.9




Soft Pro Touch
826 Taupe

LRV 17.0

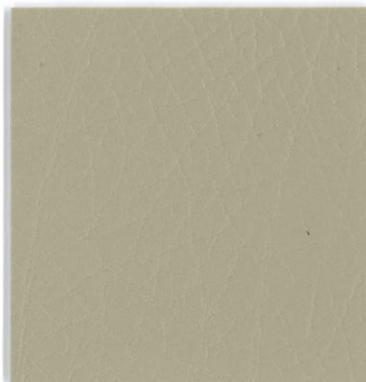

Soft Touch Pro
837 Stone

LRV 33.9

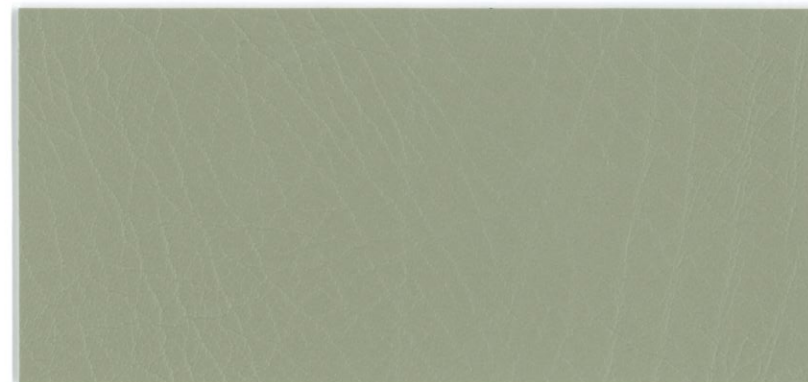

Soft Touch Pro
925 Putty

LRV 30.4



Soft Touch Pro
233 Pistachio

LRV 21.7



Soft Touch Pro
401 Amber

LRV 20.1




Soft Touch Pro
408 Terracotta

LRV 10.5



Soft Touch Pro
814 Espresso

LRV 5.1

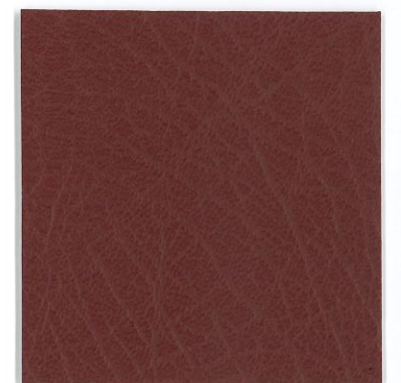

Soft Touch Pro
437 Tuscan Red

LRV 7.8



Soft Touch Pro
503 Astral Grey

LRV 15.7



Soft Touch Pro
192 Ink

LRV 5.3




Soft Touch Pro
953 Gunmetal

LRV 7.4



Soft Touch Pro
900 Black

LRV 3.3



Soft Touch Pro

Composition

PVC/Acrylic PU, Basecloth: Viscose / Polyester

Width

Approx 137cm (54")

Weight

800g/m² (± 5%)

Thickness

1.1mm

End Use

Upholstery

Flammability Ratings

BS 7176: Medium Hazard

BS 5852: 2006 Ignition Source 5

BS EN1021-1/2

NFPA 260 (USA)

CAL TB 117 (USA)

IMO FTP Code 2010 Part 8

Product Performance

Colour Fastness to Light

Grade 6+

Colour Fastness to Seawater

Grade 4 - 5

Colour Fastness to Chlorinated Water

Grade 4 - 5

Colour Fastness to Artificial Weathering

Grade 8

Hydrostatic Head

>20m

Burst Strength

1738 kPa


Abrasion

350,000+
Martindale
Rubs

100,000
Wyzenbeek
Rubs

Care Instructions

- Wipe clean routinely with a microfibre cloth lightly dampened with cold water only and then dry with a clean absorbent cloth.
 - Soak up spillages as soon as possible with an absorbent dry cloth to prevent staining.
 - If soiling has accumulated use a mild proprietary cleaner (non-alkaline). Take care to remove all soap residues and dry with a clean absorbent cloth.
 - Remove body fluids and extreme soiling immediately (within 15 minutes) with cold water then apply approved infection control protocol. Haz-Tabs, Chlor Clean, Acti-Chlor, Clinnell Universal Wipes and Panaz Shield Plus. As the concentration of bleach can vary greatly among proprietary brands we recommend these be avoided but in extreme circumstances, a 10% chlorine bleach solution may be used. Remove product residues and then dry with clean absorbent cloth.
 - Do not tumble dry.
 - Do not dry clean.
 - Do not fully immerse in water.
 - Do not apply solvents, alcohol or any other chemical cleaners.
 - Do not steam clean - heat seals in stains.
- Note dyes and pigments from indigo jeans, ball point and felt tip pens may permanently stain.

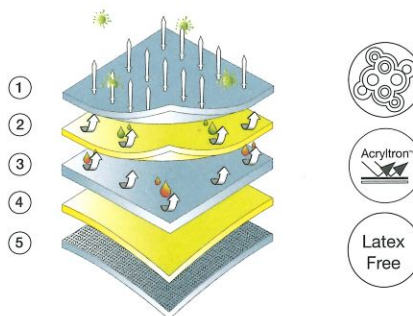

Technical Features

Flame Retardant, Waterproof, ShieldPlus™ Antimicrobial, Superior Stain Resistance with Acryltron™ Protective Coating

Environmental

REACH Compliant, Phthalate Free, Heavy Metals Free, Latex Free, PFAS Free

- ① Antimicrobial ShieldPlus™ Protection permanently inhibits the broadest spectrum of microbes (even C diff spore) and prevents nasty odours.
- ② Acryltron™ affording exceptional, improved resistance to cleaning chemicals.
- ③ Polyurethane coating - For durability and stain resistance.
- ④ PVC Core - For core strength and durability.
- ⑤ Substrate - High performance substrate providing a solid foundation.



Panaz®

Head Office: Panaz Ltd. Bentley Wood Way, Hapton, Burnley, Lancashire, BB11 5ST. England. Tel: +44 (0)1282 696969 email: sales@panaz.co.uk
Panaz USA Inc., 230 South New York Avenue, Suite 101, Winter Park, FL 32789, USA. Tel: +1 919 747 8211 email: sales@panaz.com

Continuity Although every effort is made to ensure that fabrics ordered match the colours in this pattern card, slight variations may occur from batch to batch.

© Panaz own the copyright of all designs shown in this pattern card, any infringement of which will be actioned by law.

Please note Panaz reserve the right to update product specification at their discretion.

PZ05/24